

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BVP 10/30



Handling
104 lb lightweight




Performance
Fast running and simple handling



Costs
Maintenance free exciter

Shipping dimensions in cub.yd

BVP 10/30 0.146 0.250

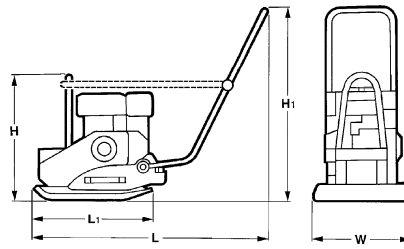

Standard Equipment

- Vibration insulated steering bow
- Detachable steering handle
- Highly wear resistant base plate
- Automatic shutdown at low oil level
- Recoil starter
- Single point lifting device
- Fully protected V-belt
- Carrying handles
- 3-2-1 Warranty

Optional Equipment

- Plastic mat
- Service Kit
- TOUGH WARRANTY
- Comfort guide handle

Dimensions in in

	H	H1	L	L1	W
BVP 10/30	19.3	33.0	41.7	20.0	11.8

Technical Data

**BOMAG
BVP 10/30**

Weights

Operating weight CECE	lb	104
Basic weight	lb	101

Dimensions

Working width	in	11.8
---------------------	----	------

Driving Characteristics

Working speed, max.	ft/min	82.0
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Honda	
Type	GX 100	
Emission stage	CARB Phase III	
Cooling	air	
Number of cylinders	1	
Performance SAE J 1349	hp	2.8
Speed	min-1	3,600
Drive system	mech.	
Fuel	gasoline	
Fuel consump. aver. during operation	gal/h	0.2

Exciter system

Frequency	vpm	6,000
Centrifugal force	lb	2,248
Amplitude	in	0.053

Capacities

Fuel	gal	0.2
------------	-----	-----

Technical modifications reserved. Machines may be shown with options.



PRUS 834 19 010

190916 Sa

BOMAG Americas, Inc.
 125 Blue Granite Parkway
 Ridgeway, SC 29130
 USA
 Tel. +1 803 3370700
 Fax +1 803 3370800
 www.bomag.com/us

