

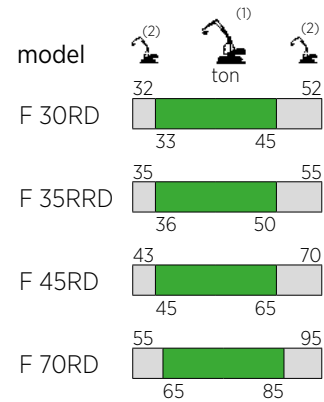


SERIE F

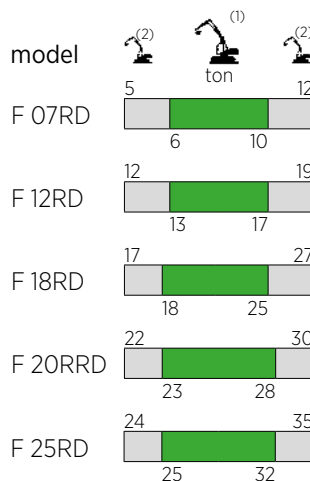

FRANTUMATORE FISSO
SECONDARY PULVERIZER
BROYEUR HYDRAULIQUE
DEMOLEDOR SECUNDARIO
STARRE PULVERISIERER
GARRA PULVERIZADORA FIXAS

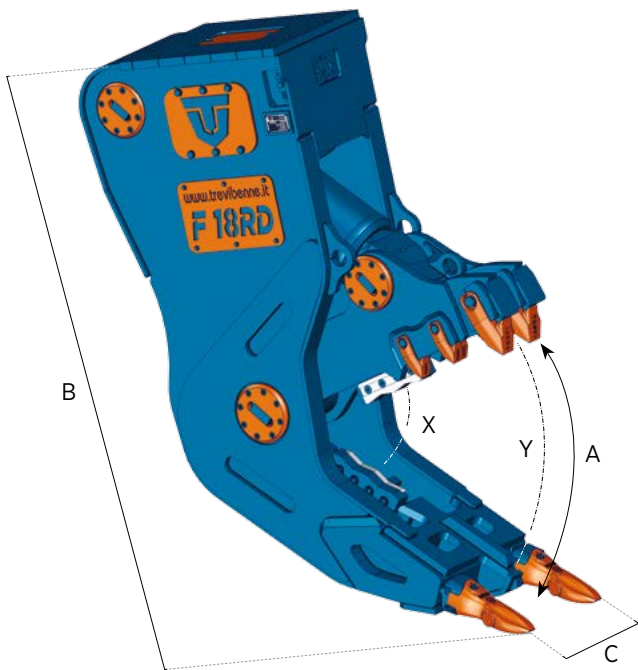

- (1) Accoppiamento escavatore-attrezzatura ottimale / Optimum excavator-equipment combination
Couplage pelle-équipement optimal / Acoplamiento excavadora-implemento optimal
Optimale Bagger-Ausrüstung Kombination / Combinação máquina-implemento ideal
- (2) Accoppiamento escavatore-attrezzatura possibile / Possible excavator-equipment combination
Couplage pelle-équipement possible / Acoplamiento excavadora-implemento posible
Mögliche Bagger-Ausrüstung Kombination / Combinação máquina-implemento possível



HARDOX®
WEAR PLATE



HARDOX®
IN MY BODY

		F 07RD	F 12RD	F 18RD	F 20RRD*	F 25RD	F 30RD	F 35RRD*	F 45RD	F 70RD
	kg.	680	1250	1990	2405	2650	3155	3720	4490	6430
A	mm.	530	700	825	825	870	950	950	1130	1250
B	mm.	1345	1600	1845	2215	1955	2100	2450	2415	2670
C	mm.	365	460	540	540	670	670	700	760	800
	mm.	140	220	260	260	260	260	260	260	325
X	t.	85	150	205	205	240	275	275	370	415
Y	t.	35	65	85	85	100	105	105	125	170
∅ max	mm.	25	30	40	40	45	50	50	60	75
	bar	250	310	310	310	310	310	310	340	340
	l/min.	60 / 120	120 / 200	200 / 300	200 / 300	250 / 350	300 / 400	300 / 400	350 / 450	450 / 600
	max bar	/	/	/	140	/	/	140	/	/
	max l/min.	/	/	/	10	/	/	30	/	/

(*) Modello fornito con rotazione idraulica continua a 360° / (***) Model equipped with continuous hydraulic 360° rotation
 (*) Modèle équipé de rotation hydraulique à 360° en continu / (***) Modelo entregado con rotación hidráulica continua a 360°
 (*) Modell ausgestattet mit hydraulischer kontinuierliche 360° Drehvorrichtung / (***) Modelo com rotação hidráulica contínua de 360°